

KTSSYSTEME



Evaluation Board for RFID Module

EVALB1356-002

KTS offers an evaluation board with RFID module which allows an easy integration of a RFID function into an existing or a new application. The board is designed to mechanically receive and electrically connect the RFID module and thus caters for an easy startup.


The evaluation board has a female socket to receive a RFID module and a 50 Ohm SMA antenna connector to connect standard antennas. Furthermore, an interface for the connection of external multiplexers is fed via test points. Communication with a host computer is made via USB interface which also provides the power supply. The board has additionally a reset button for the RFID module.

Technical specifications:

Product type	Evaluation Kit for KTS RFID Module
Antenna connection	SMA connector 50 Ohm
Power supply	USB +5V DC (max. 500 mA)
Interfaces	USB (FT230XQ); external multiplexer via testing contacts
Dimensions (LxWxH)	90 x 60 x 20 [mm]
Parity	None
Baud rate	115200
Data bits	8
Stop bits	1

Various antennas can be connected via a 50 Ohm SMA cable. The evaluation kit itself is connected to a PC/laptop over a USB interface where it receives data from a terminal program (integrated in all current Windows OS). Driver for the used USB / serial adapter can be download on KTS webpage. The necessary instruction set can be found on a separate data sheet.

The read out transponder information are transferred via the USB interface and visualized over the terminal program.

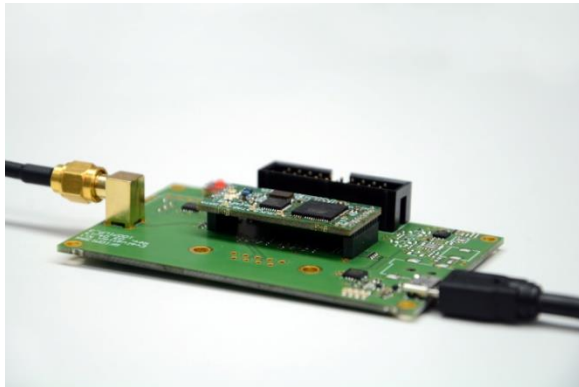

RFID module on the evaluation kit



Exemplary arrangement: Evaluation kit with RFID OEM module and 5cm PCB RFID antenna

Parameters of the emulated serial interface

Parity	None
Baud rate	115200
Data bits	8
Stop bits	1